

Introduction to Stability & Control


AE 1350




Outline

- What do we mean by aircraft stability and control?
- Static and Dynamic Stability
- Longitudinal, lateral and roll stability
- Necessary Conditions for Longitudinal stability
- Stability Margin
- Relaxed Stability Margin


A system is stable if it can recover from small disturbances



A cone resting on its base is stable




Unstable




Neutrally stable
Assumes new position caused by the disturbance

Aircraft are subjected to disturbances: gusts/turbulence

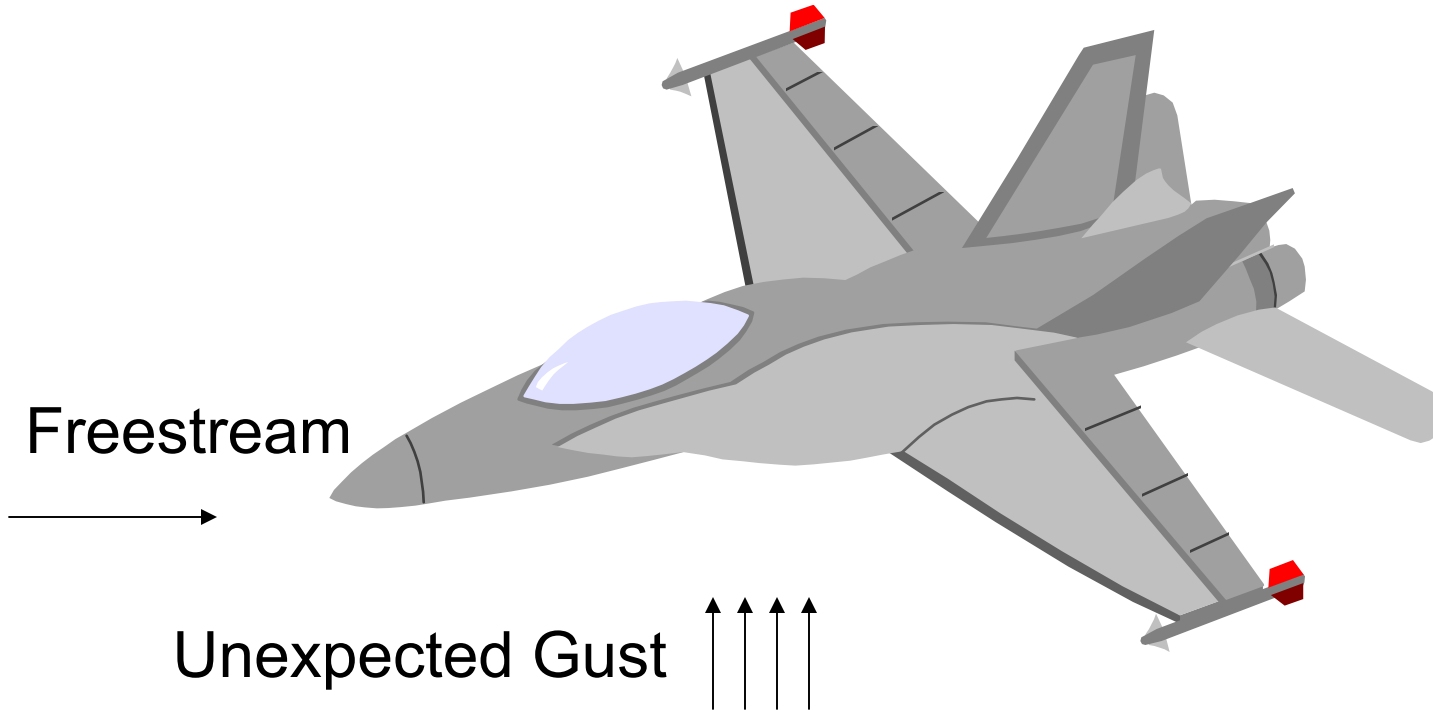

Will it recover automatically, without pilot's intervention,
and resume its original direction of flight?
If yes, then the aircraft is longitudinally stable


Longitudinal Static Stability

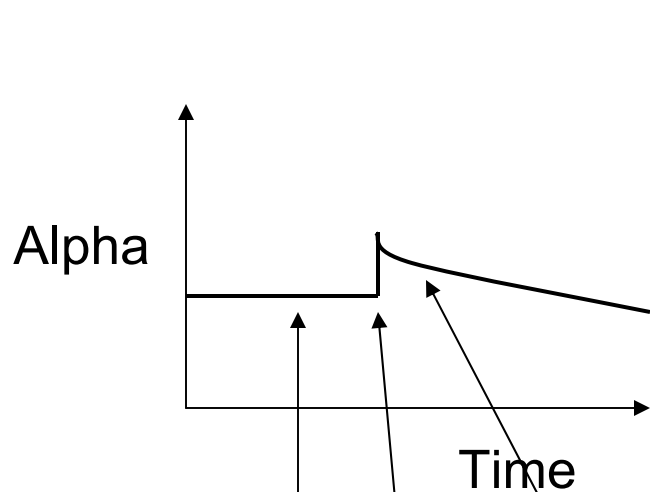

Aircraft is in steady level flight


Gust pitches the nose up

The initial tendency of the vehicle is to bring the nose down -
The aircraft is statically stable

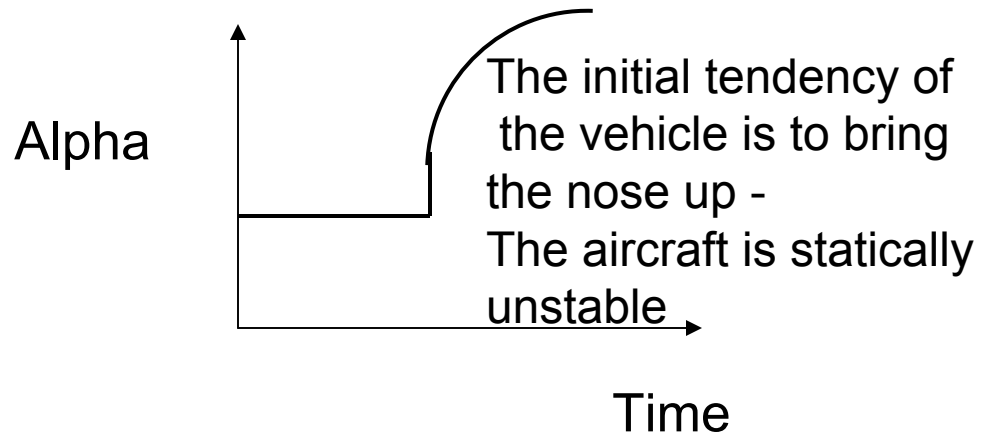

The initial tendency of the vehicle is to bring the nose up -
The aircraft is statically unstable


Aircraft may be statically and dynamically stable

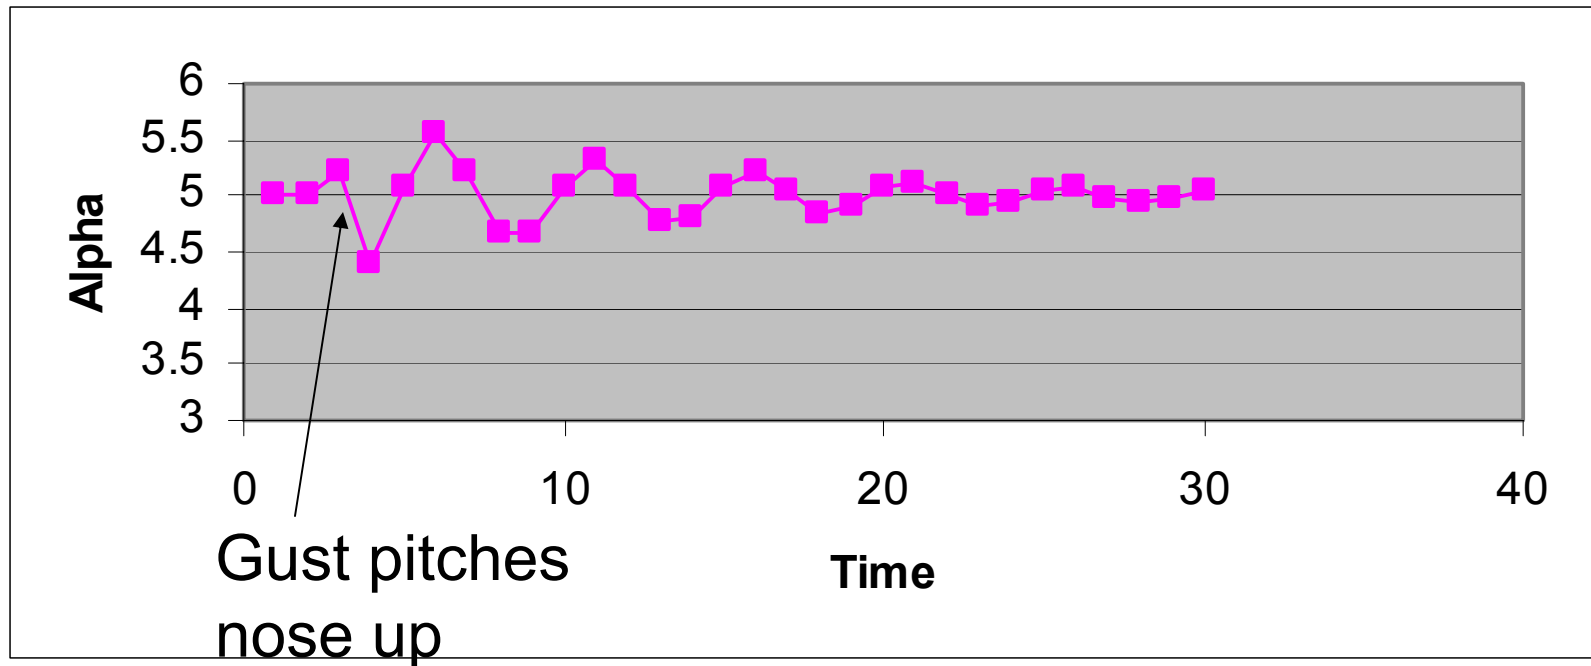


Initial tendency and long-term tendency both are to recover from a gust or disturbance

Aircraft may be statically stable, yet dynamically unstable

Longitudinal Stability

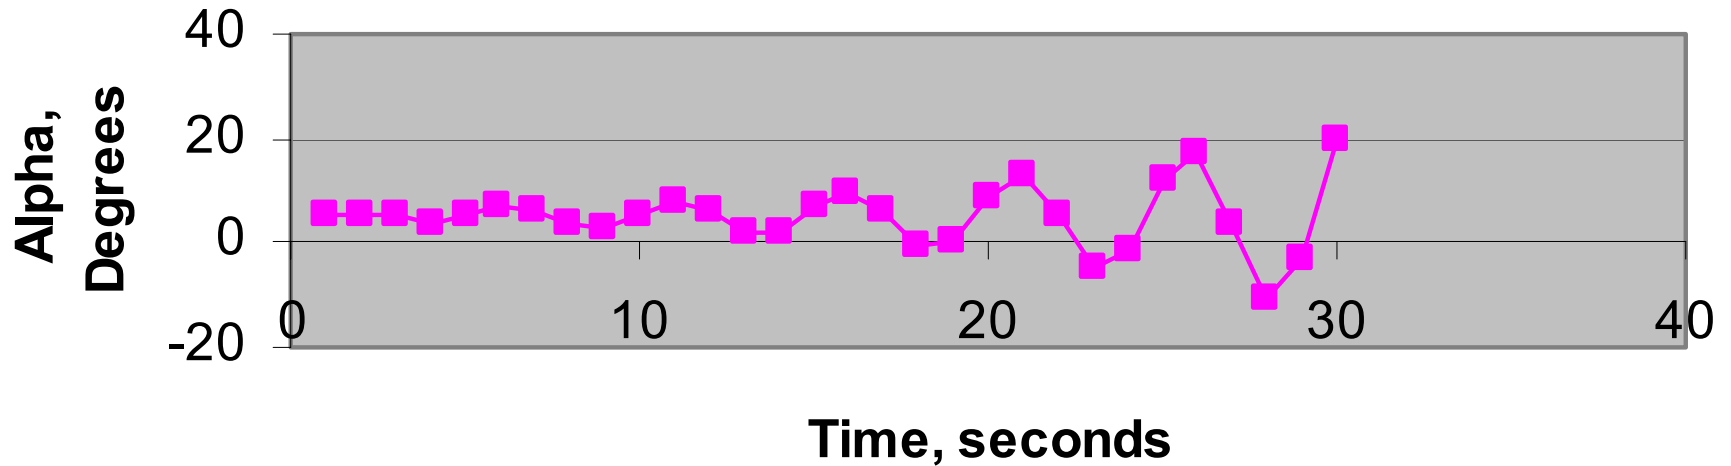

Condition for Static Stability

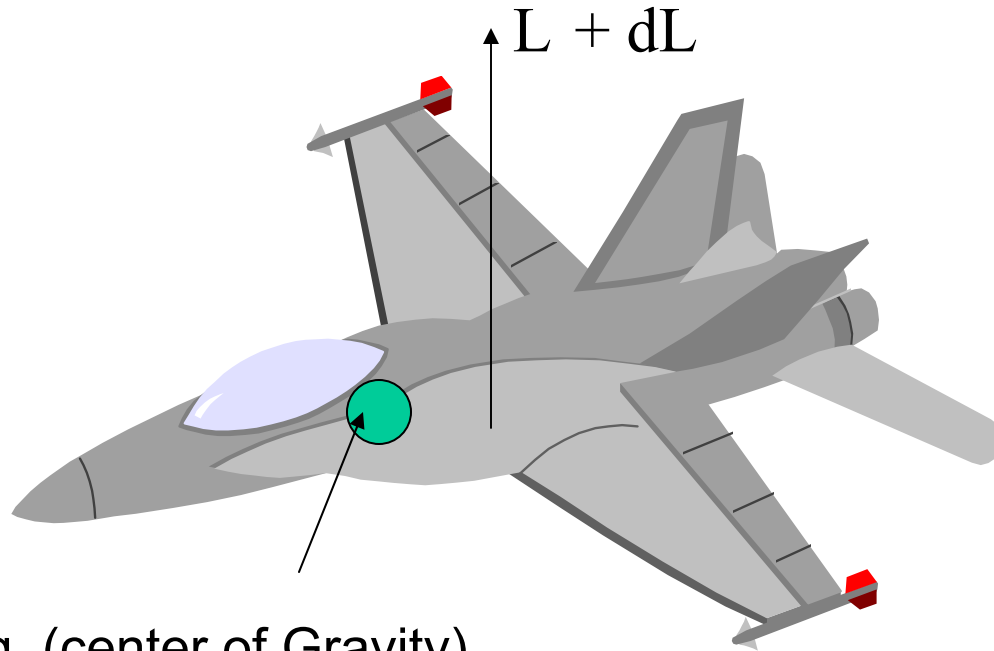

Aircraft c.g. (center of Gravity)

The gust generates a small clockwise Moment about c.g. dM , and a small positive additional lift dL

For static stability, if dL is positive (upward gust),
 dM must be negative, causing the nose to drop
Otherwise the wing will pitch up further increasing lift
 dM/dL must be negative for static stability

Nondimensionalization

Lift and pitching moment M are usually non-dimensionalized.

L is divided by $[1/2 \rho V_\infty^2 S]$ to yield C_L

M is divided by $[1/2 \rho V_\infty^2 S c]$ to yield C_M

Here, c is a reference length, e.g. “average” chord

From previous slide, dM/dL must be negative for static stability


In nondimensional form, dC_M/dC_L must be negative for static stability

The quantity $-dC_M/dC_L$ is called the static stability margin

Notice the negative sign!


The more positive it is, the more longitudinally stable the aircraft

How can a Designer Ensure Longitudinal Static stability?

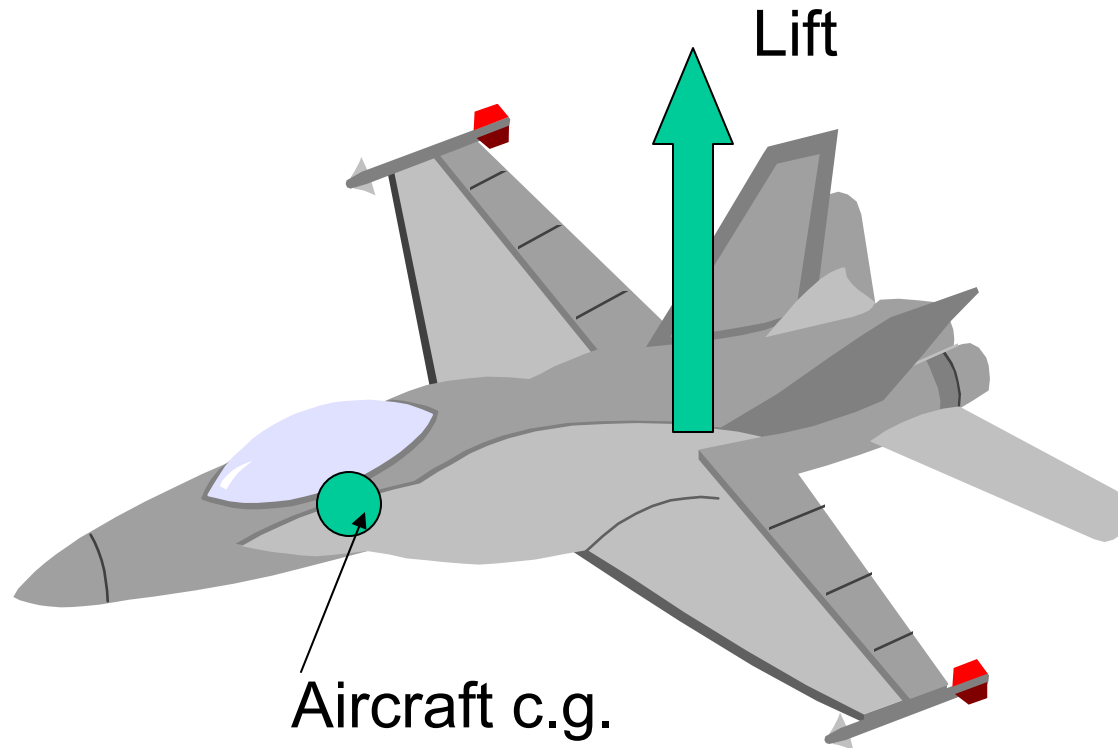

Rule #1 : Place the c.g. as far forward as possible - This will cause the nose to drop, if lift increases due to a gust, reducing α , and lift / The opposite will occur if there is downward gust

How can a Designer Ensure Longitudinal Static stability?

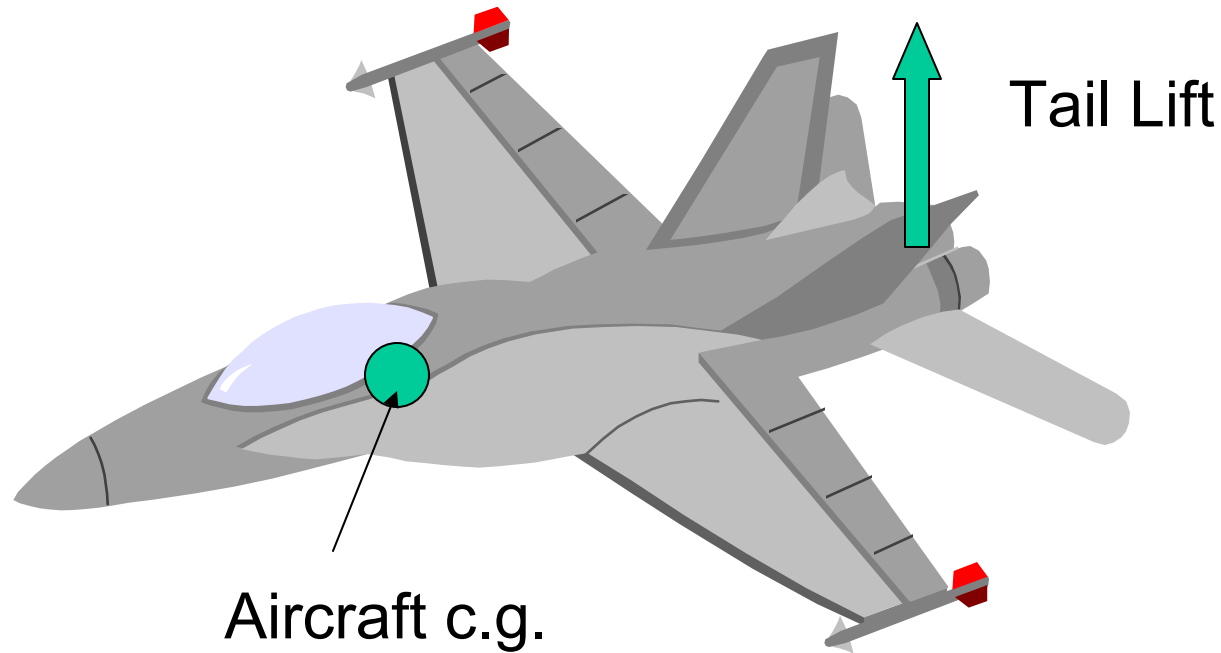

Rule #2 : Place the horizontal tail as far aft as possible - This will cause the nose to drop, if there is a vertical gust, reducing α , and lift / The opposite will occur if there is downward gust

A canard is a tail upstream of the c.g., reduced static stability (move wing aft or c.g. forward to compensate)



The price paid for a large static stability margin

- The aircraft may become sluggish, hard to maneuver; The tail will resist the pilot's attempt to change the aircraft "angle of attack"
- A large tail adds to aircraft weight, and cost
- Tail generates drag!
- A smaller tail will require a long fuselage (equivalent torque by applying force farther away) to generate enough pitching moment to bring the nose up or down

Relaxed Static Stability

- For improved maneuverability, some aircraft sacrifice the static stability margin: relaxed static stability
- Some fighter aircraft are statically unstable
 - Their nose will continue to pitch up, the lift will continue to go up after an upward gust is encountered; Result: A/C will stall, “flip over”
- These aircraft must be actively controlled by the pilot, or an onboard computer
- Redundant computer systems are present in case a computer based flight control fails

Artificial Stability Augmentation

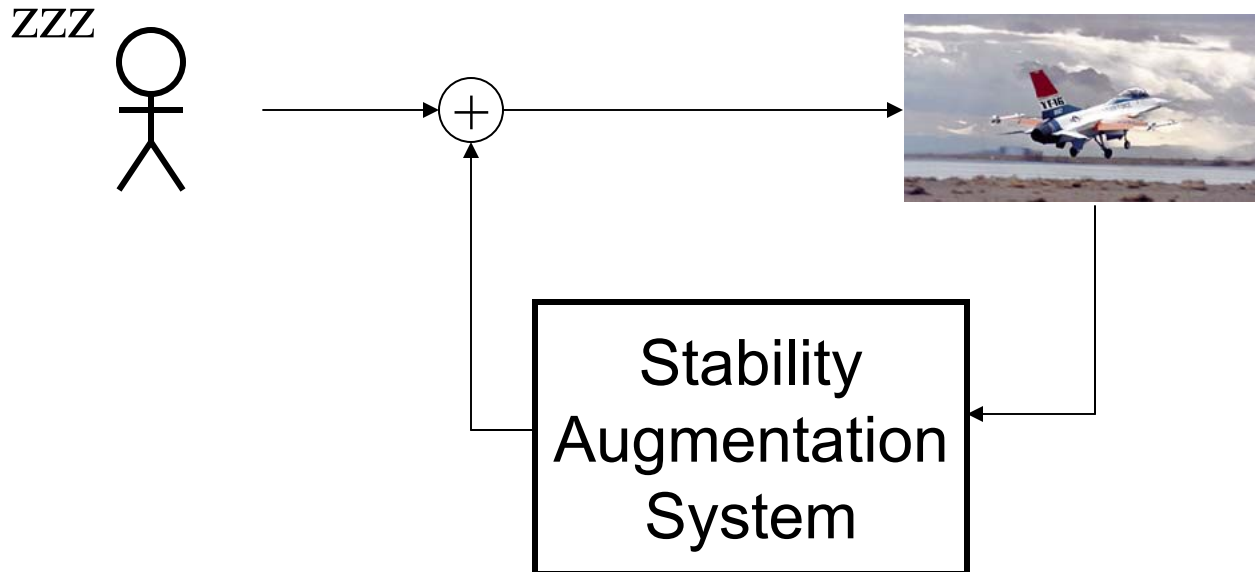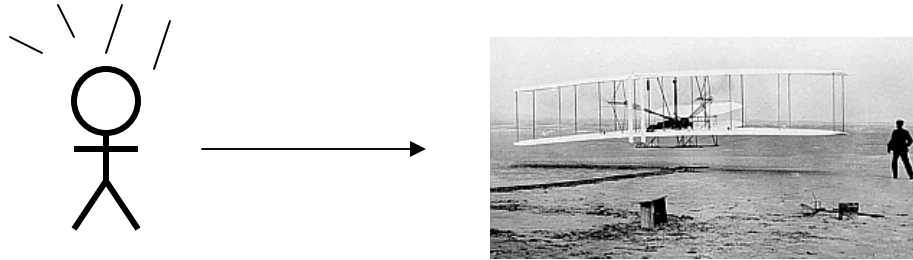


Air Transports, Boeing 747-400




Can Reduce Stability (and therefore drag)
in Cruise by Pumping Fuel to Tail

Elevators/Stab Trim: B747

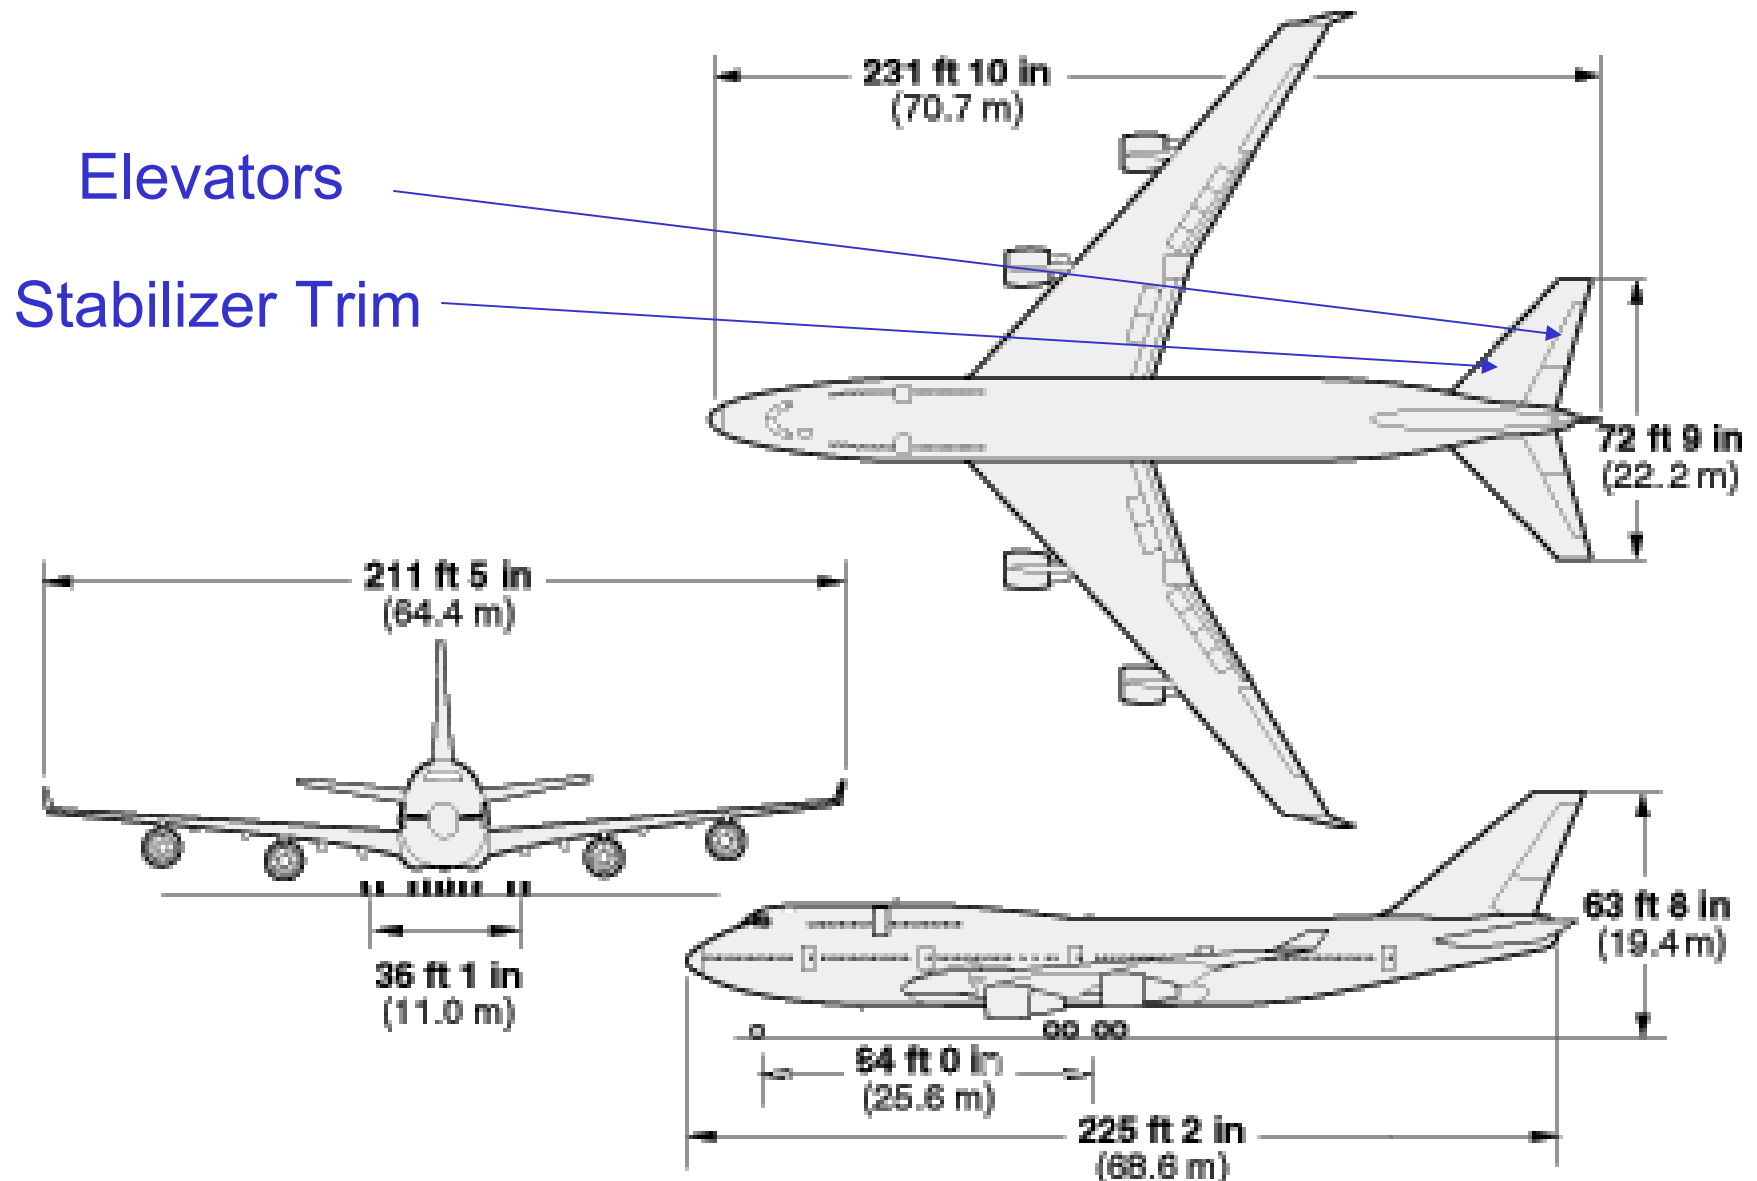

Stability and Control Augmentation

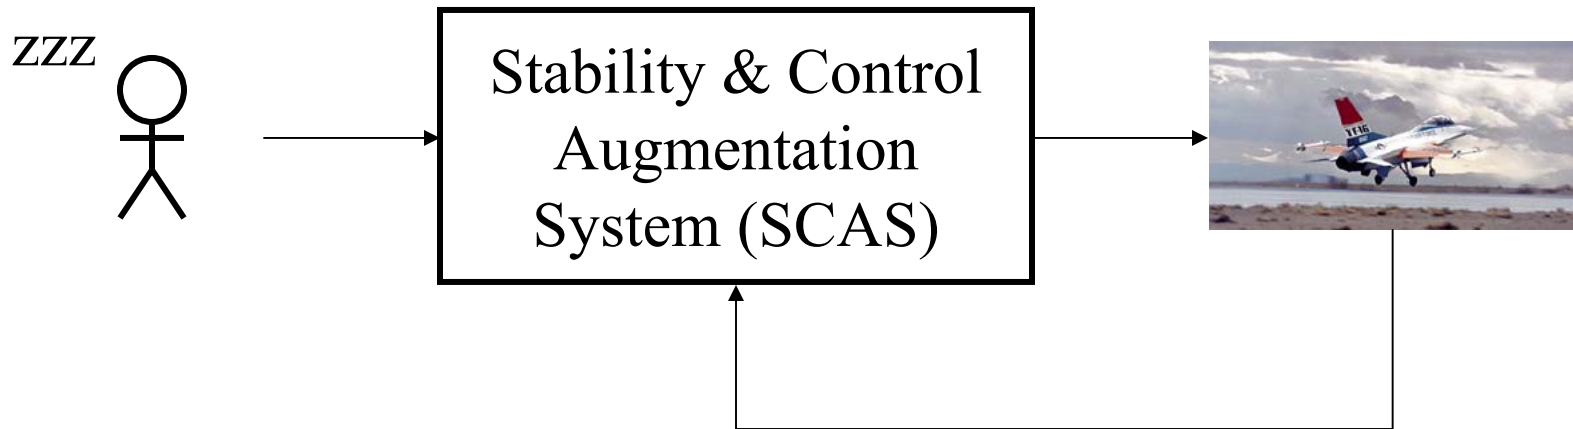

Super-augmented Aircraft



F-16



X-29



Dryden Flight Research Center EC91-491-6 Photographed 13Sep1991
X-29 smoke test. NASA photo.



Saab Gripen (JAS-39B)




Digital Fly-by-wire:
Reduced Drag at High-G

When the Actuators Saturate...



Directional Stability

Freestream comes from pilot's right side, due to cross wind
It causes nose to rotate to left
viewed from the top

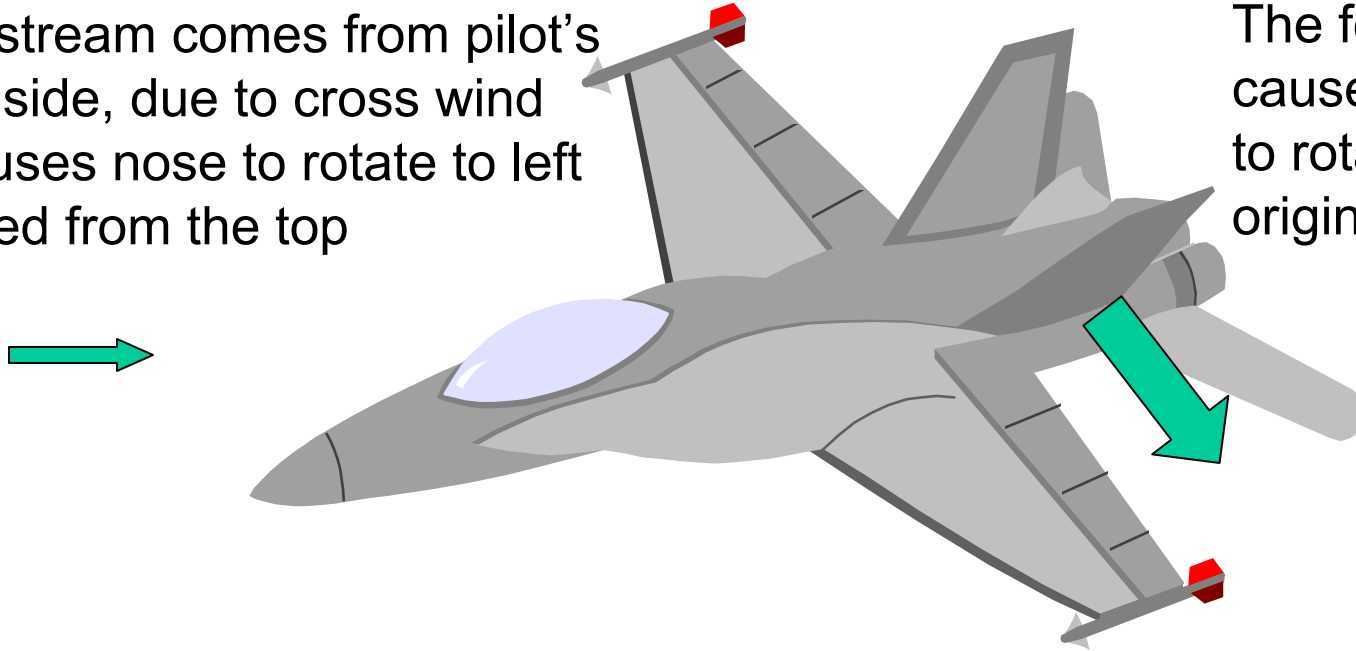


The force on the tail
causes the aircraft
to rotate back to
original direction

A cross wind may cause the nose to rotate about the vertical axis, changing the flight direction

The vertical tail behaves like a wing at an angle of attack, producing a side force, rotates the aircraft to its original direction


All of this occurs without pilot action or intervention

Enough Vertical Fin for Lightly Damped Directional Oscillations “Dutch Roll”

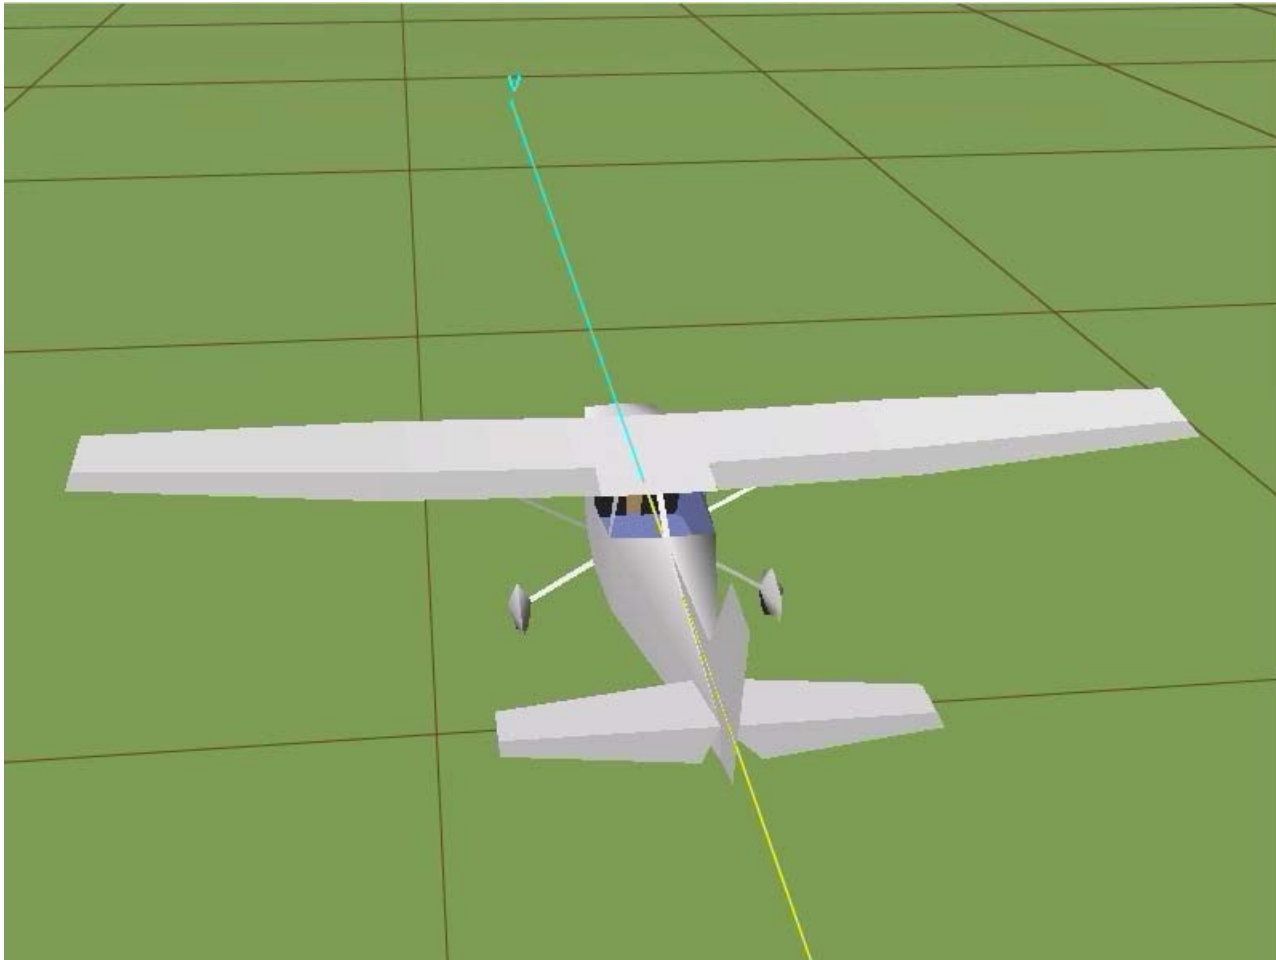


Rudders: B747

Rudders

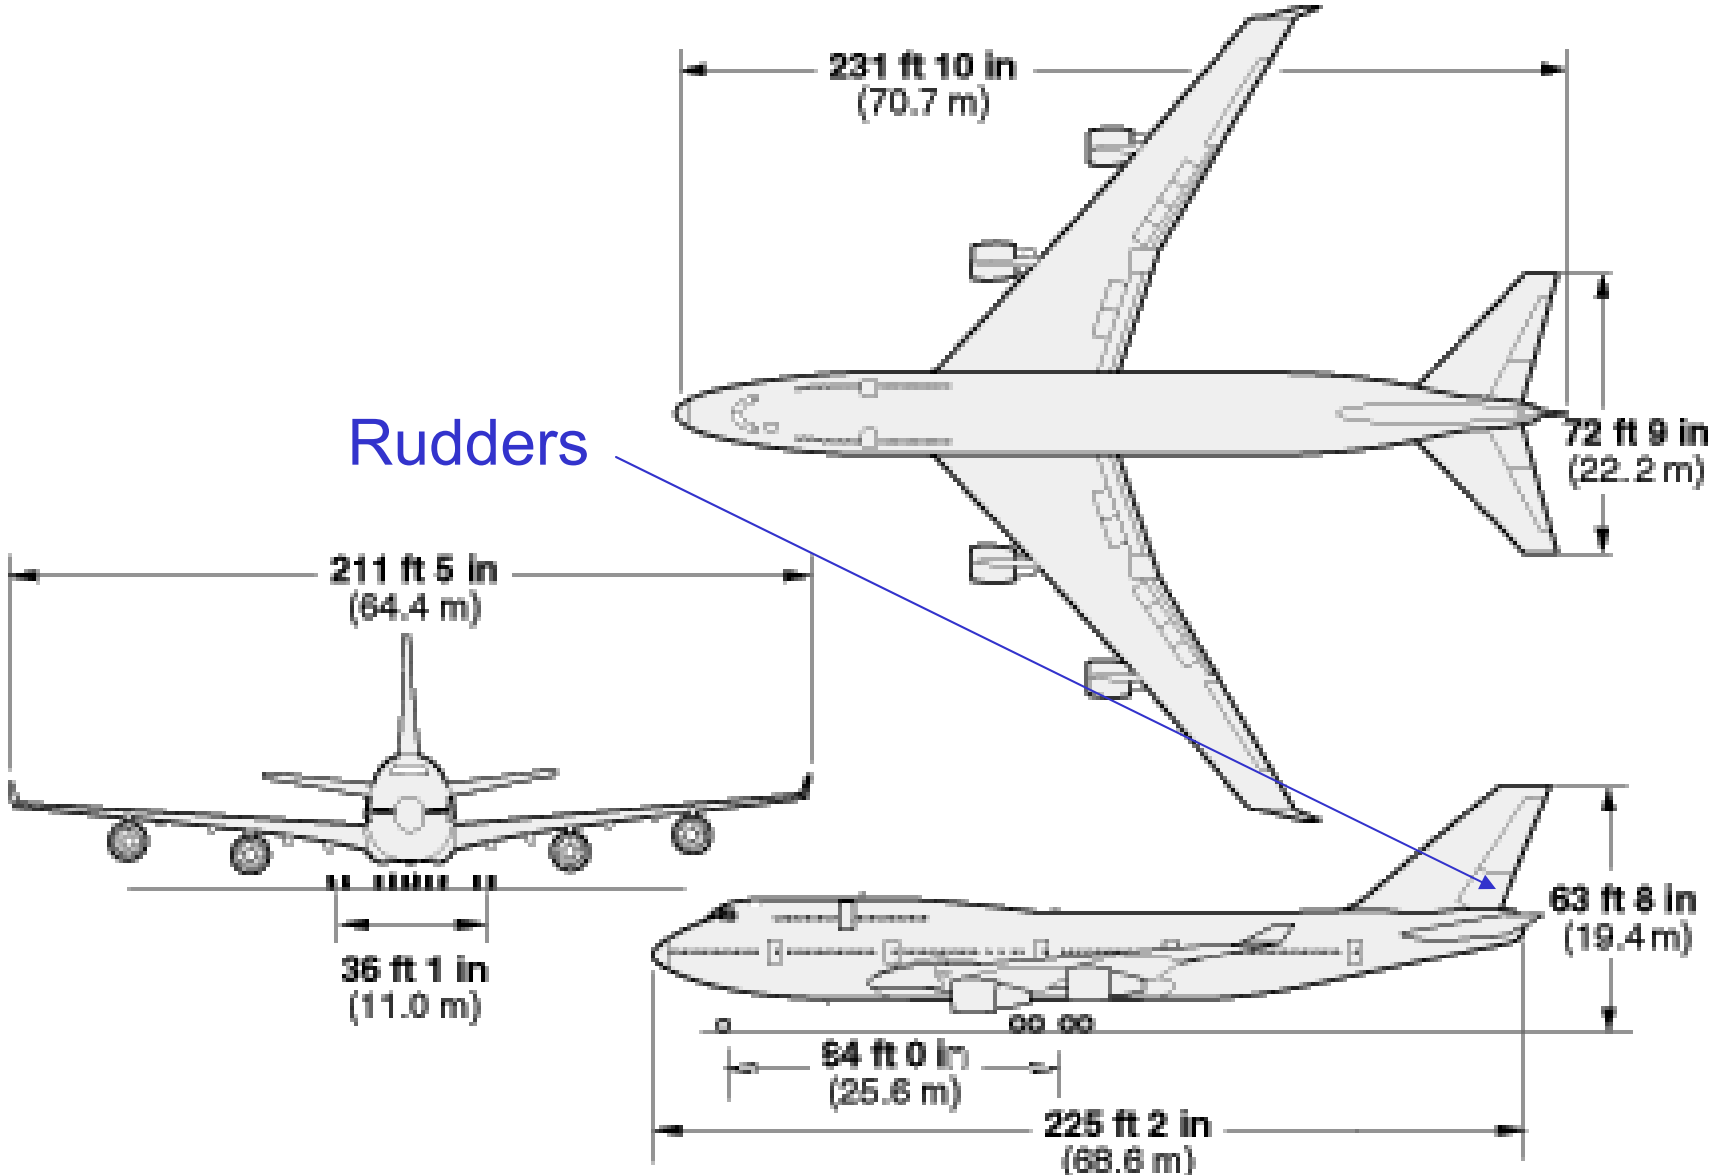

Lateral Stability


- It is the ability of the aircraft to recover from a roll disturbance without pilot intervention

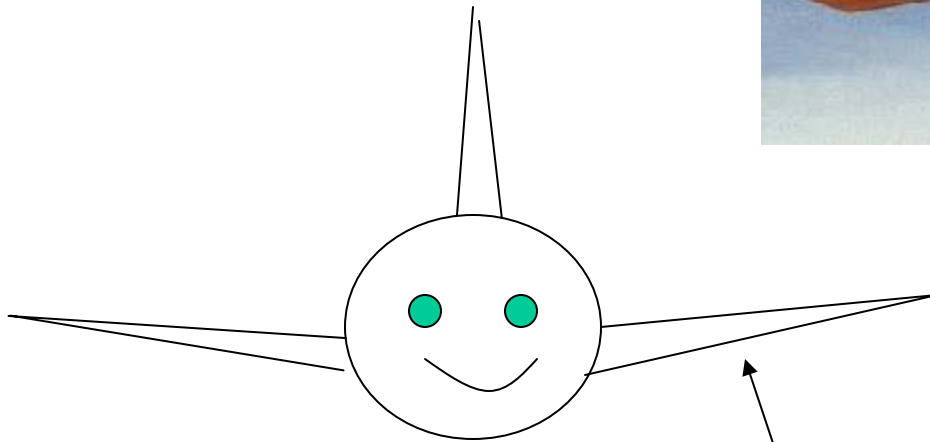

Dihedral is good for lateral stability

If the wing is tilted upwards from root to tip, it has a dihedral


What happens when the aircraft undergo a roll?

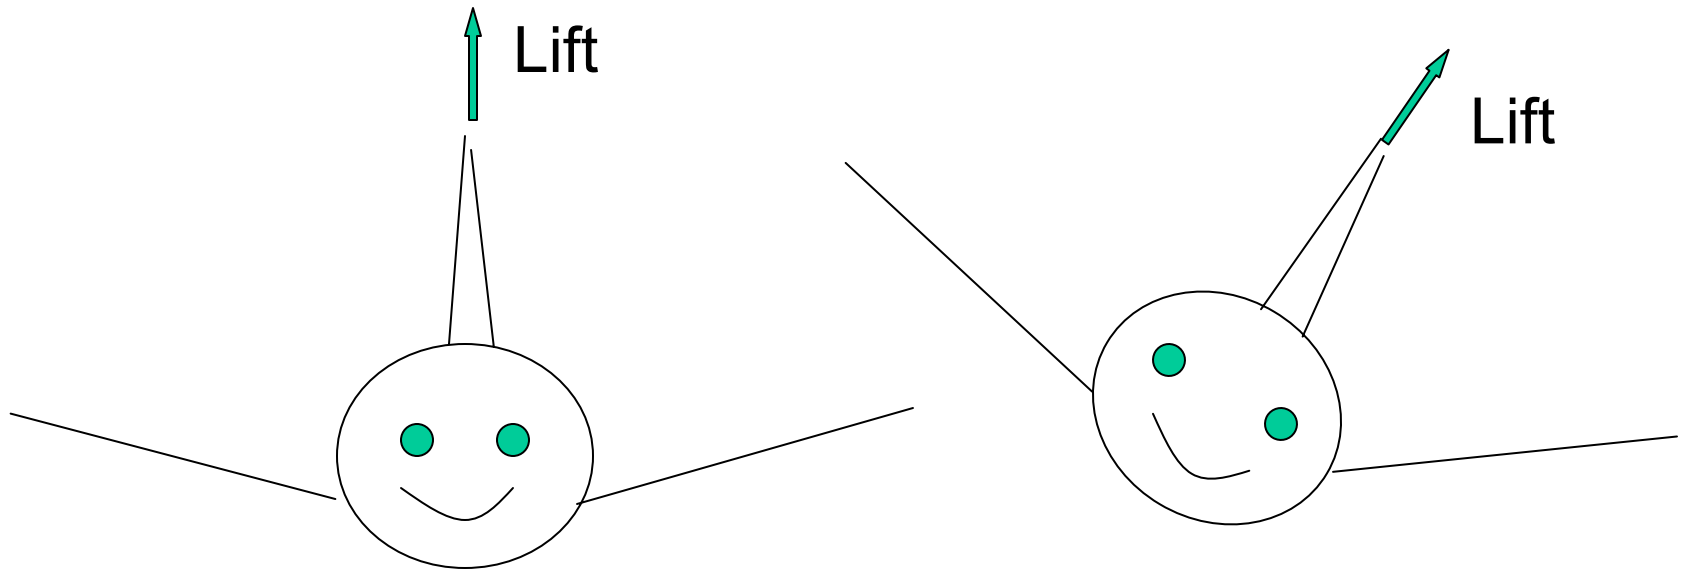


A portion of the lift is pointed sideways
The vehicle moves laterally -
This is called sideslip

During sideslip, a relative wind flows from right to left: Lateral Static Stability

A similar downwash occurs on the left wing, reducing lift

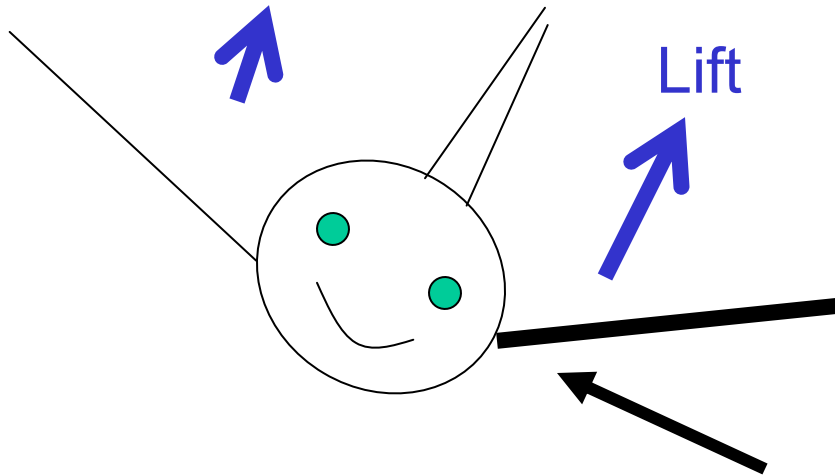

As a result, the aircraft rights itself, and recovers from the roll!

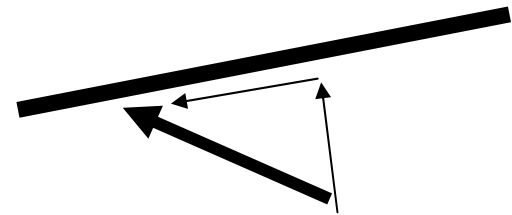


This wind has a component normal to the wing on the right, viewing from the front. This is an upwash. The upwash increases lift on the right wing.

Anhedral

Anhedral is bad for lateral stability

If the wing dips down from root to tip, it has an anhedral

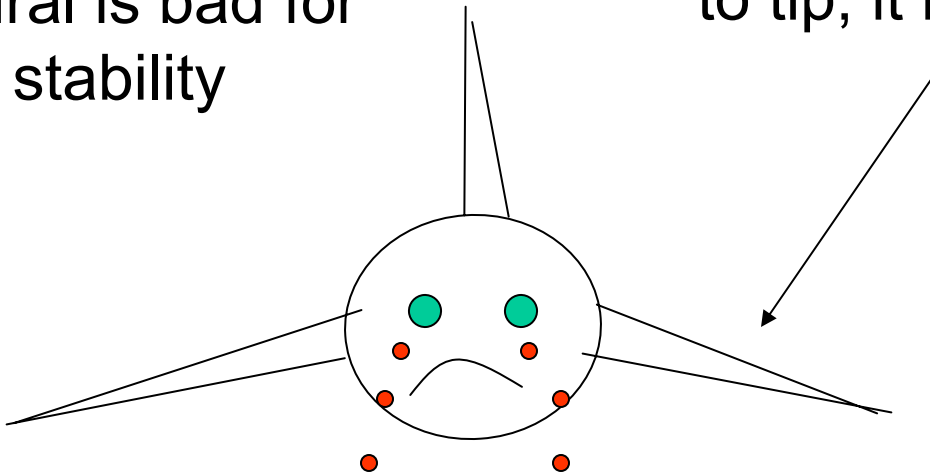

Dihedral Effect

- Dihedral effect can come from
 - From wing dihedral, high wing, or wing sweep
 - From vertical tail
- Anhedral can be used to get desired level of dihedral effect


AV-8B



F-104




High/Low Speed Ailerons: B747

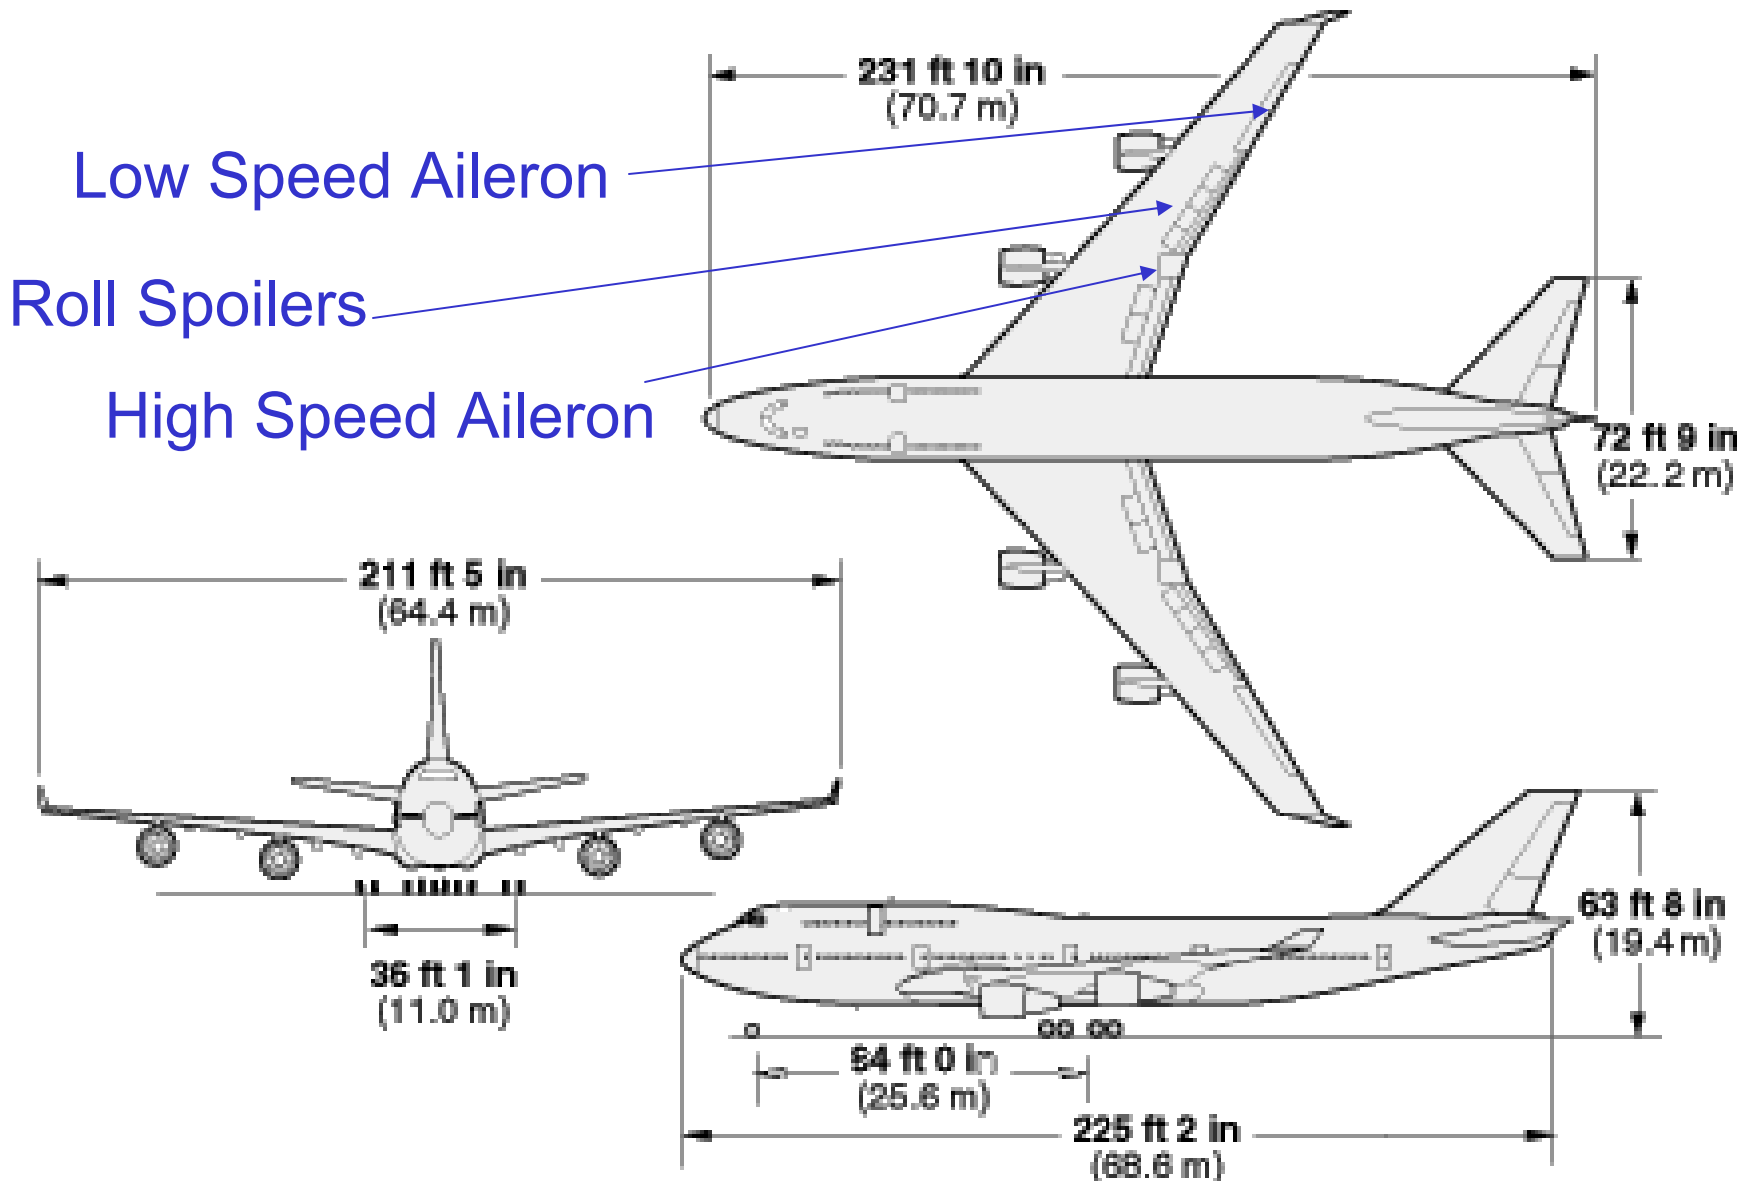

The Wrights

- Conventional Wisdom: Airplane should hold course, and the pilot should deflect the rudder to turn, the “Boat Model”
- Wrights invented wing warping, first lateral control
- Early Wright airplanes were unstable, difficult to fly, and maneuverable

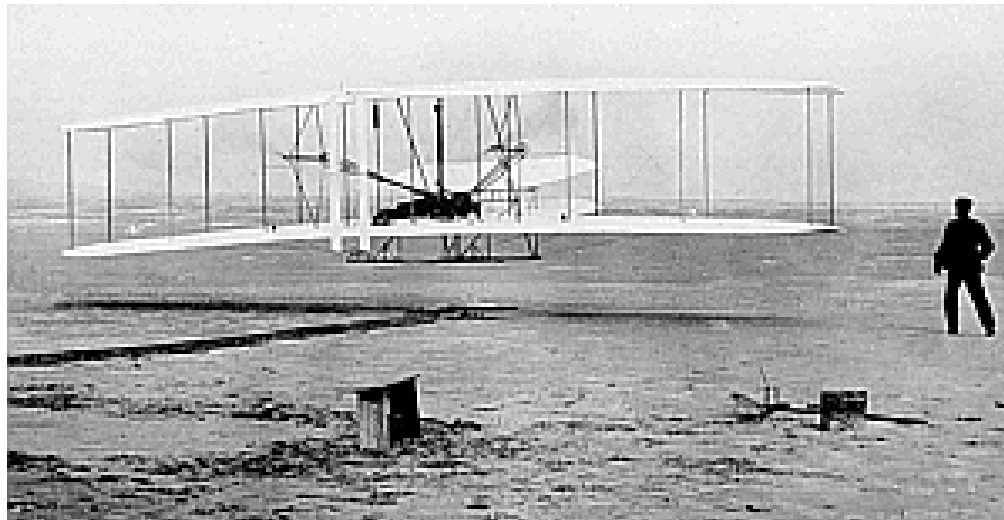

...and then it gets complicated

